


**Adaptadores Hidráulicos - Rosca SAE O-Ring**

**Serie 6405 - Macho SAE O-Ring x Hembra NPTF**

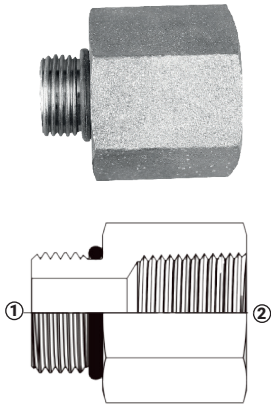

(1) Macho SAE O-ring  
(2) Hembra JIC giratoria

Rosca Macho ORB	Rosca Hembra NPTF	Acero al Carbón Zincado # de Parte	PSI
5/16"-24	1/8"-27	6405-2-2	5000
3/8"-24	1/8"-27	6405-3-2	5000
7/16"-20	1/8"-27	6405-4-2	5000
7/16"-20	1/4"-18	6405-4-4	5000
7/16"-20	3/8"-18	6405-4-6	4000
1/2"-20	1/8"-27	6405-5-2	5000
1/2"-20	1/4"-18	6405-5-4	5000
9/16"-18	1/8"-27	6405-6-2	5000
9/16"-18	1/4"-18	6405-6-4	5000
9/16"-18	3/8"-18	6405-6-6	5000
9/16"-18	1/2"-14	6405-6-8	3000
3/4"-16	1/4"-18	6405-8-4	4500
3/4"-16	3/8"-18	6405-8-6	4000
3/4"-16	1/2"-14	6405-8-8	3000
3/4"-16	3/4"-14	6405-8-12	2500
7/8"-14	1/8"-27	6405-10-2	3500
7/8"-14	1/4"-18	6405-10-4	3500
7/8"-14	3/8"-18	6405-10-6	3500
7/8"-14	1/2"-14	6405-10-8	3000
7/8"-14	3/4"-14	6405-10-12	2500
1 1/16"-12	1/4"-18	6405-12-4	3500
1 1/16"-12	3/8"-18	6405-12-6	3500
1 1/16"-12	1/2"-14	6405-12-8	3000
1 1/16"-12	3/4"-14	6405-12-12	2500
1 1/16"-12	1"- 11 1/2	6405-12-16	2000
1 3/16"-12	3/4"-14	6405-14-12	2500
1 3/16"-12	1"- 11 1/2	6405-14-16	2000
1 5/16"-12	1/2"-14	6405-16-8	3000
1 5/16"-12	3/4"-14	6405-16-12	2500
1 5/16"-12	1"- 11 1/2	6405-16-16	2000
1 5/16"-12	1 1/4" - 11 1/2	6405-16-20	1150
1 5/16"-12	1 1/2" -11 1/2	6405-16-24	1000
1 5/8"-12	3/4"-14	6405-20-12	2500
1 5/8"-12	1"- 11 1/2	6405-20-16	2000
1 5/8"-12	1 1/4" - 11 1/2	6405-20-20	1150
1 5/8"-12	1 1/2" -11 1/2	6405-20-24	1000
1 7/8"-12	1"- 11 1/2	6405-24-16	2000
1 7/8"-12	1 1/4" - 11 1/2	6405-24-20	1150
1 7/8"-12	1 1/2" -11 1/2	6405-24-24	1000
1 7/8"-12	2"-11 1/2	6405-24-31	1000
2 1/2"-12	1 1/4" - 11 1/2	6405-32-20	1150
2 1/2"-12	1 1/2" -11 1/2	6405-32-24	1000
2 1/2"-12	2"-11 1/2	6405-32-32	1000