DATA SHEET

A109 Twin Welding Line Delivery Hose

The Right Connection®

Bonded twin-line hose designed to fulfill AS1335 specifications, guaranteeing the safe transfer of oxygen and acetylene for welding, cutting and allied processes across diverse industrial sectors.

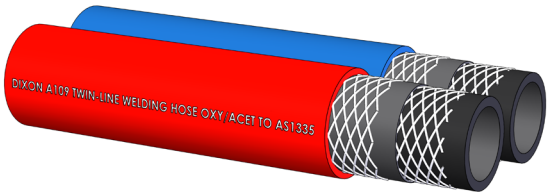

Hose Construction

Tube: SBR blend - black
Cover: SBR blend, smooth - blue & red
Reinforcing: Polyester yarn

Features

- Ozone resistant
- Weather resistant
- Oil mist resistant
- Pin pricked cover
- Extruded

Temperature

- -20°C to 70°C

Standards

- AS1335:1995

Part Number

- To view available part number options please click here

Dimensions (mm)		Pressures				Vacuum (bar)	Weight (kg/mtr)	Bend Radius (mm)	Coil Lengths (mtr)
		Working		Burst					
ID	OD	PSI	Bar	PSI	Bar				
4.8	12.0	217	15	870	60	n/a	0.28	40	20, 100

Product Code: DB21