


Uniones, Cruces, Curvas y Bidas


Unión Lateral Soldable Sin Pulir - B28WA

D.E. Tubing	A (in)	B (in)	C (in)	Pared Nominal (in)	Acero Inoxidable 316L # de Parte
1"	6.00	1.00	5.00	.065	B28WA-R100U
1-1/2"	7.38	1.19	6.19	.065	B28WA-R150U
2"	8.75	1.63	7.13	.065	B28WA-R200U
2-1/2"	10.00	1.50	8.50	.065	B28WA-R250U
3"	10.75	1.88	8.88	.065	B28WA-R300U
4"	12.81	2.02	10.75	.083	B28WA-R400U
6"	18.00	3.00	14.50	.109	B28WA-R600U

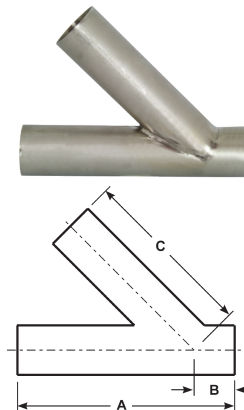

Unión Y Soldable Sin Pulir - B28W

D.E. Tubing	A (in)	B (in)	Pared Nominal (in)	Acero Inoxidable 316L # de Parte
1"	2.00	2.44	.065	B28W-R100U
1-1/2"	2.00	2.44	.065	B28W-R150U
2"	2.63	3.25	.065	B28W-R200U
2-1/2"	3.37	4.13	.065	B28W-R250U
3"	4.00	4.88	.065	B28W-R300U
4"	5.38	5.38	.083	B28W-R400U
6"	8.00	8.00	.109	B28W-R600U

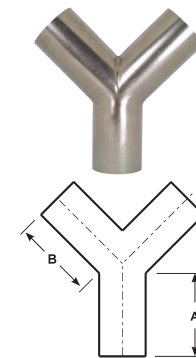

Codo 180° Soldable Sin Pulido - B2WUL

Característica

- Los dobleces son estándar 1.5 x el diámetro del tubing

D.E. Tubing	A (in)	B (in)	Pared Nominal (in)	Acero Inoxidable 316L # de Parte
1"	3.00	2.00	.065	B2WUL-R100U
1-1/2"	4.50	3.00	.065	B2WUL-R150U
2"	6.00	4.00	.065	B2WUL-R200U
2-1/2"	7.50	5.00	.065	B2WUL-R250U
3"	9.00	6.00	.065	B2WUL-R300U
4"	12.00	8.00	.083	B2WUL-R400U



Cubierta Protectora para Extremo Soldable - BCW

Aplicación:

- Utiliza estas cubiertas para proteger los extremos en conexiones soldables, válvulas y bombas.

Medida	Vinil # de Parte
1/2"	BCW-050
3/4"	BCW-075
1"	BCW-100
1-1/2"	BCW-150
2"	BCW-200
2-1/2"	BCW-250
3"	BCW-300
4"	BCW-400
6"	BCW-600
8"	BCW-800

