



Férulas de Asiento Biselado

Férulas de Asiento Biselado Roscado con Receso - 15

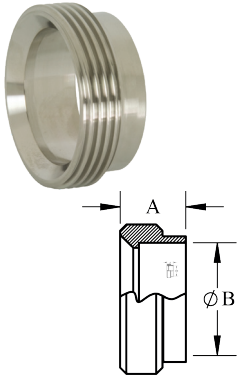

D.E. Tubing	A (in)	B (in)	Acero Inoxidable 304 # de Parte
1"	0.81	1.01	15-G100
1-1/2"	0.88	1.51	15-G150
2"	1.03	2.01	15-G200
2-1/2"	1.13	2.51	15-G250
3"	1.25	3.01	15-G300
4"	1.38	4.01	15-G400


Férulas de Asiento Biselado Roscado sin Receso - 15R

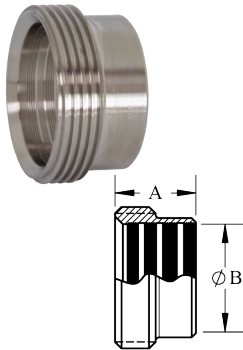

D.E. Tubing	A (in)	B (in)	Acero Inoxidable 304 # de Parte
1"	.81	1.01	15R-G100
1-1/2"	1.13	1.51	15R-G150
2"	1.38	2.01	15R-G200
2-1/2"	1.50	2.51	15R-G250
3"	1.63	3.01	15R-G300
4"	1.68	4.01	15R-G400

Férulas de Asiento Biselado Roscado de Muro Ligero - 15WL


63-04
621

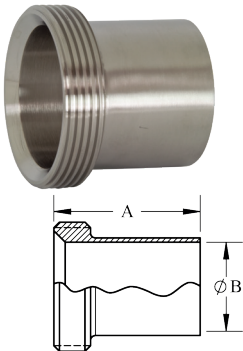

D.E. Tubing	A (in)	B (in)	Acero Inoxidable 304 # de Parte
1"	2.00	.87	15WL-G100
1-1/2"	2.25	1.37	15WL-G150
2"	2.50	1.87	15WL-G200
2-1/2"	2.75	2.37	15WL-G250
3"	3.00	2.87	15WL-G300
4"	4.00	3.83	15WL-G400

Férulas de Asiento Biselado Roscado de Muro Pesado - 15W

63-04
621

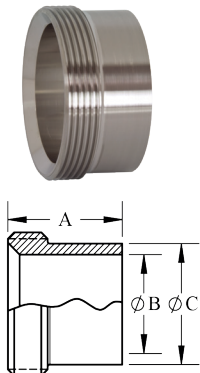

D.E. Tubing	A (in)	B (in)	C (in)	Acero Inoxidable 304 # de Parte	Acero Inoxidable 316L # de Parte
1"	1.50	.87	1.16	15W-G100	15W-R100
1-1/2"	1.63	1.37	1.68	15W-G150	15W-R150
2"	1.75	1.87	2.19	15W-G200	15W-R200
2-1/2"	1.75	2.37	2.71	15W-G250	15W-R250
3"	1.81	2.87	3.22	15W-G300	15W-R300
4"	2.13	3.83	4.26	15W-G400	15W-R400