



Conexiones Biofarmacéuticas "High Purity"

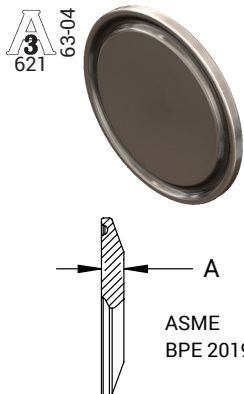

BPE Tabla DT-4.1.5-2

Tapas Solidas para Extremo - T16AMP

D.E. Tubing	A (in)	Acabado PL - SF1	Acabado PM - SF4
1/2" - 3/4"	1.00	T16AMP-050075PL	T16AMP-050075PM
1" - 1-1/2"	1.99	T16AMP-100150PL	T16AMP-100150PM
2"	2.52	T16AMP-200PL	T16AMP-200PM
2-1/2"	3.05	T16AMP-250PL	T16AMP-250PM
3"	3.58	T16AMP-300PL	T16AMP-300PM
4"	4.69	T16AMP-400PL	T16AMP-400PM
6"	6.56	T16AMP-600PL	T16AMP-600PM

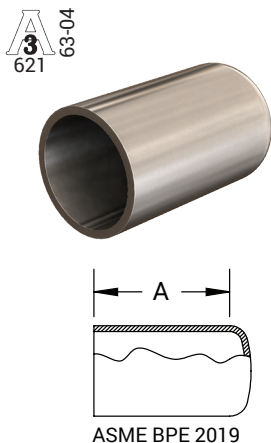

BPE Tabla DT-4.1.5-1

Tapas Soldables - T16W

D.E. Tubing	A (in)	Acabado PL - SF1	Acabado PM - SF4
1/2"	1.50	T16W-050PL	T16W-050PM
3/4"	1.50	T16W-075PL	T16W-075PM
1"	1.50	T16W-100PL	T16W-100PM
1-1/2"	1.50	T16W-150PL	T16W-150PM
2"	1.50	T16W-200PL	T16W-200PM
2-1/2"	1.50	T16W-250PL	T16W-250PM
3"	1.50	T16W-300PL	T16W-300PM
4"	2.00	T16W-400PL	T16W-400PM
6"	2.50	T16W-600PL	T16W-600PM

NOTA: Especificaciones BPE 2019.

Acabado PL – SF1.
 D.E. = 32Ra Pulido Mecánico.
 D.I. = 20Ra Pulido Mecánico.

Acabado PM – SF4.
 D.E. = 32Ra Pulido Mecánico.
 D.I. = 15Ra Pulido Mecánico y Electropulido.